

## **2 Way Power Splitter**

## TIPS-0727-NF-2


Trilogy's 2 Way Power Splitter is a 698 – 2700 MHz two-way power splitter. -150 dBc PIM rated. Reactive type, 500 W, suitable for indoor / outdoor environment. High reliability and low insertion loss.

- Wide Frequency Band
- Low Insertion Loss
- ♦Low VSWR
- Low Intermodulation
- ♦Widely used in IBS & DAS
- ♦ Guaranteed one year standard

## **Technical Specifications**

Frequency: 698 MHz -2700 MHz Input Ports: 2-Way Split Loss(dB): 3.0dB Insertion Loss(dB):  $\leq 0.35$ VSWR: 1.3 PIM: -150 dBc Average Power: 200W RF Connector: N Female Working Temperature(deg): -35°C -70°C Relative Humidity: 5%-95% Color: Black Weigh: 340gra



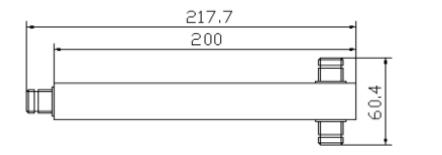



©2023 Trilogy Communications, Inc. All rights reserved. All trademarks identified by ® are registered trademarks of Trilogy Communications. All Specifications are subject to change without notice. See www.trilogyrf.com or call 800-TRILOGY for the most current information. Issue 05/15/23

